


LASAK BioniQ QR Exocad library structure



Scanbody QR,
indexed - long
Ref. No. 2815.00

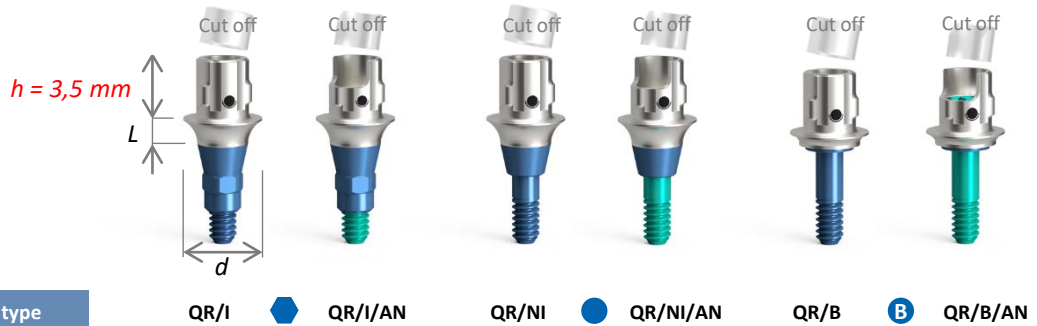

Connection type

QR/I



QR/I/AN

QR/NI



QR/NI/AN

QR/B



QR/B/AN

Application

Solo crown

Linear bridge

Bridge

Ref. No. 2858.00




S3.5
S4.0
T4.0
S5.0
T5.0

Specification		L0.7	L1.5	L2.5	Compatible burn-out coping
QR/I/d4.5/h5.5, indexed - wide		2218.07	2218.15	2218.25	B (d4.5)
QR/I/d4.5/h8.0, indexed - wide		2225.07		2225.25	B (d4.5)
QR/I/d4.5/h3.5, indexed - wide			2230.15		B (d4.5)
QR/I/d3.8/h5.5, indexed - narrow		2216.07	2216.15		A (d3.8)
QR/NI/d4.5/h5.5, non-indexed - wide		2220.07	2220.15		B (d4.5)
QR/B/d4.5/h5.5/B, bridge - wide		2221.07	2221.15		B (d4.5)
QR/B/d4.5/h3.5/B, bridge - wide			2234.15		B (d4.5)
QR/I/AN/d4.5/h5.5, indexed - wide		2219.07	2219.15		-
QR/NI/AN/d4.5/h5.5, non-indexed - wide		2227.07	2227.15		-
QR/B/AN/d4.5/h5.5, bridge - wide		2226.07	2226.15		-

LASAK BioniQ QN Exocad library structure



Scanbody QN,
indexed – long
Ref. No. 2840.00

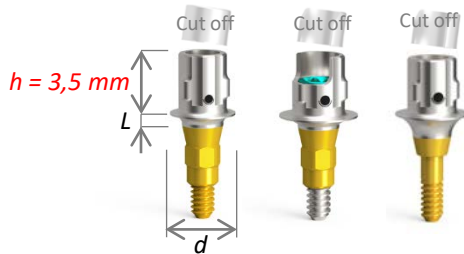

Connection type

QN/I  QN/I/AN  QN/NI




Application

Solo crown Linear bridge

Ref. No. 2859.00



S2.9

Specification		L0.7	L1.5	L2.5	Compatible burn-out coping
QN/I/d3.8/h5.5, indexed – narrow		2208.07	2208.15		A (d3.8)
QN/NI/d4.5/h5.5, indexed – wide			2213.15		–
QN/I/AN/d4.5/h5.5, indexed – wide		2211.07	2211.15		–