


### LASAK BioniQ QR Exocad library structure



Scanbody QR,  
indexed – narrow  
Ref. No. 2876.00

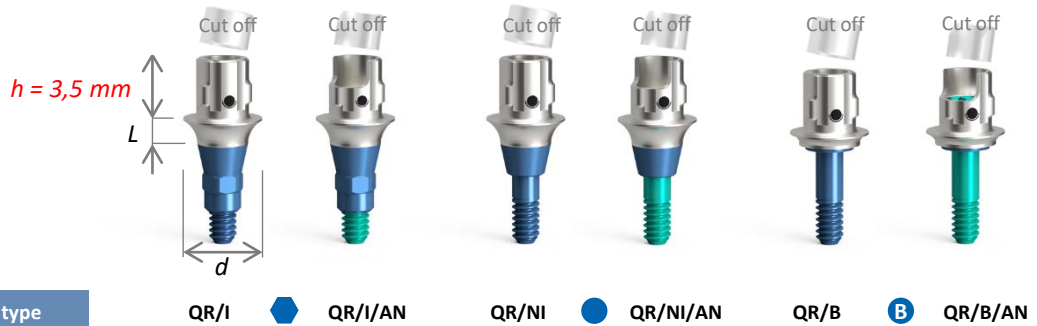

Connection type

QR/I



QR/I/AN

QR/NI



QR/NI/AN

QR/B



QR/B/AN

Application

Solo crown

Linear bridge

Bridge

Ref. No. 2858.00




S3.5  
S4.0  
T4.0  
S5.0  
T5.0

Specification		L0.7	L1.5	L2.5	Compatible burn-out coping
QR/I/d4.5/h5.5, indexed – wide		2218.07	2218.15	2218.25	B (d4.5)
QR/I/d4.5/h8.0, indexed – wide		2225.07		2225.25	B (d4.5)
QR/I/d4.5/h3.5, indexed – wide			2230.15		B (d4.5)
QR/I/d3.8/h5.5, indexed – narrow		2216.07	2216.15		A (d3.8)
QR/NI/d4.5/h5.5, non-indexed – wide		2220.07	2220.15		B (d4.5)
QR/B/d4.5/h5.5/B, bridge – wide		2221.07	2221.15		B (d4.5)
QR/B/d4.5/h3.5/B, bridge – wide			2234.15		B (d4.5)
QR/I/AN/d4.5/h5.5, indexed – wide		2219.07	2219.15		–
QR/NI/AN/d4.5/h5.5, non-indexed – wide		2227.07	2227.15		–
QR/B/AN/d4.5/h5.5, bridge – wide		2226.07	2226.15		–

### LASAK BioniQ QN Exocad library structure



Scanbody QN,  
indexed – narrow  
Ref. No. 2877.00

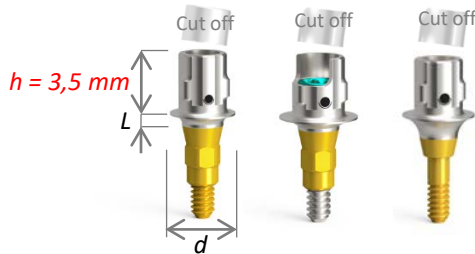

Connection type

QN/I



QN/I/AN



QN/NI

Application

Solo crown

Linear bridge



Specification		L0.7	L1.5	L2.5	Compatible burn-out coping
QN/I/d3.8/h5.5, indexed – narrow		2208.07	2208.15		A (d3.8)
QN/NI/d4.5/h5.5, indexed – wide			2213.15		–
QN/I/AN/d4.5/h5.5, indexed – wide		2211.07	2211.15		–